28

Michael Mrissa, Jan Vcelak , László Hajdu, Balázs Dávid, Miklós Krész, Jakub Sandak, Anna Sandak, Rok Kanduti, Monika Varkonji Sajn, Anja Jutraz, Katja Malovrh Rebec

Extending BIM for Air Quality Monitoring



Extending BIM for Air Quality Monitoring

M. Mrissa^{1,2}, J. Vcelak³, L. Hajdu^{1,2}, B. David^{1,2}, M. Kresz^{1,2}, J. Sandak^{1,2}, A. Sandak^{1,2}, R. Kanduti⁴, M. Varkonji Sajn⁵, A. Jutraz⁶, K. Malovrh Rebec⁷

¹ InnoRenew CoE Livade 6, 6310 Izola, Slovenia email: {firstname.surname}@innorenew.eu

² Univerza na Primorskem Glagoljaška ulica 8, 6000 Koper - Capodistria, Slovenia email: {firstname.surname}@upr.si

³ Czech Technical University in Prague, University Centre for Energy Efficient Buildings Trinecka 1024, Bustehrad, 27343, Czech Republic email: jan.vcelak@cvut.cz

⁴ Špica International Pot k sejmišču 33, 1231 Ljubljana - Črnuče, Slovenia email: Rok.Kanduti@spica.com

⁵ Unistarpro d.o.o. Litostrojska Cesta 56, 1000 Ljubljana, Slovenia email: monika.varkonji@unistarpro.si

⁶ Nacionalni Inštitut za Javno Zdravje Trubarjeva cesta 2, 1000 Ljubljana, Slovenia email: anja.jutraz@nijz.si

⁷ Zavod za Gradbeništvo Slovenije Dimičeva ulica 12, 1000 Ljubljana email: katja.malovrh@zag.si

SUMMARY: As we spend more than 90% of our time inside buildings, indoor environmental quality is a major concern for healthy living. Recent studies show that almost 80% of people in European countries and the United States suffer from SBS (Sick Building Syndrome), which affects physical health, productivity and psychological well-being. In this context, environmental quality monitoring provides stakeholders with crucial information about indoor living conditions, thus facilitating building management along its lifecycle, from design, construction and commissioning to usage, maintenance and end-of-life. However, currently available modelling tools for building management remain limited to static models and lack integration capacities to efficiently exploit environmental quality monitoring data. In order to overcome these limitations, we designed and implemented a generic software architecture that relies on accessible Building Information Model (BIM) attributes to add a dynamic layer that integrates environmental quality data coming from deployed sensors. Merging sensor data with BIM allows creation of a digital twin for the monitored building where live information about environmental quality enables evaluation through numerical simulation. Our solution allows accessing and displaying live sensor data, thus providing advanced functionality to the end-user and other systems in the building. In order to preserve genericity and separation of concerns, our solution stores sensor data in a separate database available through an application programming interface (API), which decouples BIM models from sensor data. Our proof-of-concept experiments were conducted with a cultural heritage building located in Bled, Slovenia. We demonstrated that it is possible to display live information regarding environmental quality (temperature, relative humidity, CO2, particle matter, light) using Revit as an example, thus enabling end-users to follow the conditions of their living environment and take appropriate measures to improve its quality.

KEY WORDS: Building information model, Internet of Things, environmental quality monitoring, healthy living



1 INTRODUCTION

Conservation and renovation of cultural heritage buildings is a priority of the UNESCO Sustainable Development Goals (SDGs) as a part of the culture preservation program¹. It is as well a major concern for public and private owners. In this context, Information and Communication Technology (ICT) is ideal to provide stakeholders with crucial information about the building state and its environment and contribute to facilitating renovation processes.

However, current available tools for building monitoring and management remain particularly limited and lack integration capacities. On the one side, most popular software used for designing building (such as ArchiCAD, AutoCAD, Dynamo, Grasshopper, Maya, SketchUp, Revit, Rhino 3D, etc.) remain static, fragmented and barely compatible with each other. On the other side, Internet of Things (IoT) solutions, while they provide highly needed dynamic information about building conditions, are not integrated into existing modeling tools.

In this paper, we describe a solution to exploit data coming from building sensors via building modeling tools. We show how it is possible to use Building Information Model (BIM) attributes in order to provide the building modeling tool with specific information that allows accessing and displaying sensor data. We describe our solution to provide information about IoT sensors deployed in buildings so that modeling tools can access it and provide advanced functionality to the end user. The prototype software plug-in was created in Revit, but the same solution can be replicated in most state-of-the-art programs used by building designers. We focus on air quality monitoring, an essential aspect of healthy living and a major concern for building renovation. Our experiments have been conducted with a cultural heritage building located in Bled, Slovenia. We manage to display live information about air quality in a tool like Revit, therefore enabling stakeholders to follow air quality conditions before, during and after the renovation process. Our sensors measure temperature, relative humidity, pressure, CO2, particulate matter, luminosity, volatile organic compound. Such information may enable taking adequate measures to improve air quality such as opening windows in case of high CO2 level.

This paper is structured as follows: Section 2 highlights the need to integrate air quality information into the BIM to enable live monitoring of the building. Section 3 reviews most relevant work in the area and shows how air quality information is not yet integrated into BIM products. Section 4 presents our contribution to enable air quality information to be accessible to end users through BIM integration. Section 5 illustrates our proposal with a use case developed with a building from the Slovenian cultural heritage. Section 6 summarizes the results obtained and gives some guidelines for future work.

2 MOTIVATION

The use of BIM can be widely extended from (relatively sophisticated) designing tool for 3D structure and installations to variety of diverse aspects related to the building itself. Some of the state-of-the-art BIM additions can be used, for example, to simulate the indoor thermal, lightening and acoustic conditions which cumulatively affect the comfort and well-being of occupants. It supports different types of automated evaluation and analyses which are helpful for improving the building operations in terms of human comfort. It provides a 3D virtual environment with a workflow of integrated information through a software package capable to predict and decrease problems and errors [1]. The BIM as a digital representation of the building offers the unique possibility to combine diverse information related to the facility, including all phases of its life - from the concept to demolition and recycling. For that reason, it is feasible to consider it as a storage of the overall service-life performance data that can be automatically acquired by sensors or any IoT solutions (amongst others). The model of a building will contain therefore an additional layer, simplifying data access. This provides possibility for early warning of undesired building conditions that can automatically alert the building owner or users about the threat and recommended solutions. On the other hand, accessing well structured (time and location-wise) readings from sensors provides a unique possibility to validate simulation models already integrated with BIM. It is expected that further building modelling tools will develop in a close future. The same data would be highly useful for development of such models and further extension of the BIM usability.

_

¹ https://en.unesco.org/courier/2017-april-june/culture-heart-sdgs



BIM is recently used to document and manage cultural heritage structures. The Historic Building Information Modelling (HBIM) for the integration of contemporary technology and BIM approach in the field of cultural heritage documentation was introduced by [2]. HBIM can be implemented to enhance the performance of existing heritage buildings or plan for the conservation of unused facilities. The research reported here is a follow-up of the HBIM project conducted for the historic building Mrakova Domačia located in Bled (Slovenia). The old farmhouse was constructed in the eighteenth century and was abandoned for more the 40 years. The structure and interior were perfectly preserved and represent an authentic example of the ancient culture and habits in this Slovenian region. Just recently, the Local authorities in collaboration with Institute of Cultural Heritage of Slovenia decided to renovate the building and organize a modern exhibition place attracting visitors and tourists. The original HBIM model developed for the needs of this restoration included inventory of current building elements and their general conditions. It was found however, that several other aspects (than structure itself) are not represented as data or simulation models. Moreover, an effect of the restoration action on the building microclimate was difficult to predict, not to mention the reconstruction effects on human health. For that reason, monitoring of Indoor Air Quality (IAQ) was considered as an interesting addition to the HBIM-based model. In this context, the current IAQ state as well as its changes during and after restoration are assessed by the custom developed prototype sensor network, with all acquired data integrated with the HBIM model. As a result, the system allows an easy access to information about indoor pollutants and ambient air conditions that are highly useful to quantify an impact of the activities carried out in the building and during its future occupancy.

3 RELATED WORK

Due to industrial needs and building digitization, Building Information Modelling (BIM) [3] has become more and more important in the last decade. The main objective of the original idea is to support sharing, storing and managing information during the whole building lifecycle from the design phase to the operational period and to facilitate an interoperable communication channel in the architecture, engineering and construction (AEC) industry. More detailed description about the original model and an overview about methodologies can be found here [4,5]. The main advantage of the BIM model, which is regulated by the platform neutral Industry Foundation Classes (IFC) and Green Building XML (gbXML), is to be an open format specification that is not controlled by a single vendor or group of vendors in the field.

The BIM provides an efficient tool to describe the model and the essential properties of the building, however additional features, such as cost estimation, project management and IoT technology support are not available in the original format. It can be stated that with the expansion of the Building Information Modelling, the digital representation of the newly built structures is becoming a general practice in the field, but it is also important to exploit the original idea to create a commonly usable methodology to support existing and old buildings and extend the functionality of the original model to keep it ready to operate with latest technologies. Since the components of the building in the model are represented by objects, and the objects contain the different properties and attributes of the represented element, the structure of the model gives opportunity to extend the functionality effectively and use the existing digital representations to provide additional functionalities. In the literature, possible extension scenarios were introduced in [6].

3.1 Overview of BIM extensions

Researchers from different fields have demonstrated the extendibility of the original model. The different BIM extensions can be grouped by the application area of the extended model, and in the literature most research is focusing on the extensions that can be used in existing software applications. In most cases, building designers use CAD based software tools to create the 3D model of the building, such as Autodesk Revit or other CAD based software. An example of the extensions is the multidimensional model (nD) concept where the original model was expanded with dimensions where cost, accessibility, maintainability, sustainability, crime, energy, whole life costing, acoustics, and scheduling were included into the original model [7]. The n dimensional model also includes the life cycle assessment of the corresponding building. Other research papers are focusing on heat modelling and structural simulations in a case of fire or other disasters [8], where for example evacuation plans can be tested [9]. The following extension tries to evaluate the sustainability level and architectural designs using the Building Information Model [10]. These different BIM extensions are from several areas, and the original model is suitable to handle additional functionalities to provide a general and effective modelling methodology of our buildings.

IoT is the abbreviation of Internet of Things and it refers to the broad range of different devices and physical objects connected to each other and to the Internet in order to exchange and collect data. It includes the use of sensors,



actuators, communication equipment, data storage, computing devices, analytical and other software to achieve the desired behavior of connected devices or obtain the needed results. The following paper gives us a good overview about the IoT related extendibility of the original BIM model [11]. Nowadays, IoT solutions are becoming an important part of our life, and the integration of smart features, sensors, data processing and analysis of collected data into the BIM has become a key research area. It is also important to see that until now the model was used by researchers and the main contributors of the building industry, nevertheless IoT solutions give us an opportunity to bring the BIM closer to the end users, creating a widely used and general computer environment and support the area of smart buildings and system development. The usage of the IoT in BIM can be highly important if we are talking about the protection of cultural heritage. The different expansions of the model can be connected to movable objects in the building, HVAC vibrations or VOC measuring, energy monitoring and management, or harmful environmental effects. The following articles can give an overview about IoT and BIM integration in cultural heritage buildings [12,13,14].

3.2 Air quality monitoring

Air quality monitoring plays a major role if we are talking about human health in building environment. It is well known that air pollutants (e. g NOx, CO, BTEX, PAH, PM10, PM2.5, PM1, O3, SO2) can cause serious health problems. With the spread of IoT solutions, air quality monitoring has become a widely available and, in most cases, cheap solution to protect building users. In Europe, the World Health Organization (WHO) identified and recommended QA (Quality Assurance) and QC (Quality Control) activities to create a comparable methodology for Air Quality measurements. The following article gives us a good overview of sensor systems for air quality monitoring [15]. The installed sensor systems in public or private buildings are mostly low-cost sensors [16]. A good description about low-cost sensors can be found here [17]. The integration of air quality sensors into the BIM system is an important research area both from health and technological point of view.

From this perspective, and considering the state of the art, our research has for originality and main advantage to create an extended format which can be passed along different environments and encapsulate the information from the installed sensors in the building. The proposed methodology extends existing and commonly accepted IFC attributes, that results in direct integration of IoT solutions available for air quality assessment into the BIM modelling approach. It also presents the advantage to store sensor data on the cloud, therefore not overloading the data already present in BIM and allowing for runtime data access from the cloud storage.

4 CONTRIBUTION

Our contribution relies on the exploitation of BIM model attributes to enable access to sensor data. We designed an architecture that supports data collection and storage as well as its access through a Revit plugin that we developed. Our architecture presented in Fig. 1 shows the organization of our solution.

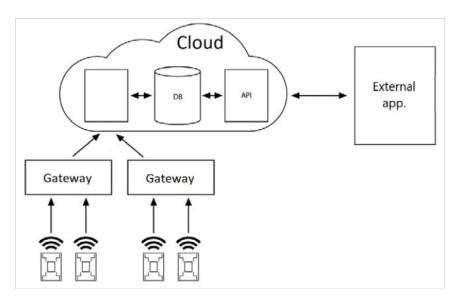


Figure 1. General architecture overview



Sensors connect to a gateway that forwards data to the cloud (we relied on the Microsoft Azure solution). Our cloud software receives data through its Application Programming Interface (API) and stores in a database that provides long term storage and makes data accessible to any external application such as Revit through another API. Our data model allows each organization to register buildings and store related sensor data. Management of building, sensors and data is realized through our developed Web interface or Revit plugin. Our plugin is visible in the Revit program above the ribbon "BIMSockets" and offers the following actions: "edit sensor", "last record" and "report".



Figure 2. Revit plugin graphical interface

Our plugin communicates with our REST API hosted in Azure cloud. First users must authenticate, then select building from their list. Once a building is selected its parameters are written to Revit project information. The plugin saves building identification number and name, obtained from the API available online².

For displaying and storing data we created new BIM objects which represent sensors. To add a sensor, users are provided with a list of sensors, defined for a building. After selecting a sensor, the user must place it in a room, representing its physical location, on an object face. Selected sensor information is stored in the project. To ensure data transfer from Revit to other applications implementing BIM we decided to reuse common properties of objects, more specifically "Identity data". Sensor identification number is written in the "Mark" property and its display name is stored in the "Comment" property. With this solution, exporting model for other programs also exports data added with our extension. Each sensor can only be added once per building, however multiple different sensors can be added in a building.

After successful deployment of sensors throughout building and connecting them to our platform, we can access their data through Revit. This can be accomplished with selecting desired sensor and selecting either "Last Record", if we are looking for last reading transmitted from sensor, or "Report" where user select period and type of data aggregation. To test that data transfers from one BIM program to another, we exported our model to IFC format and imported it in free IFC viewer "BIM Vision". After exporting all the required data transfer from Revit to IFC file. A major advantage of our solution is that only the information that allows the plugin to get access to data is stored in the BIM model, not the data itself, therefore keeping the BIM model as light as possible and allowing data updates without introducing any changes into the BIM. Fig. 3 shows measures displayed for a temperature sensor in Mrakova Domačia.

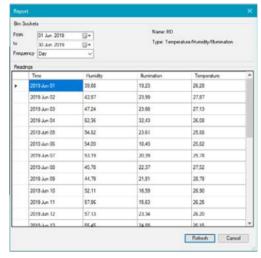


Figure 3. Sensor measurements displayed with our Revit plugin

5 CONCLUSION

In this paper, we show an architecture to collect data sensor networks and enables their visualization in building modeling tools. We describe how we exploit specific attributes of the Building Information Model (BIM) in order to provide building modeling tools with specific information that allows accessing and displaying sensor data. Our prototype software plug-in was created in Revit, but our solution applies to most state-of-the-art programs used by building designers. We focus on air quality monitoring, an essential aspect of healthy living and a major concern for building renovation.

² https://zoneiotapi.azurewebsites.net/docs/index.html



Our experiments have been conducted with a cultural heritage building located in Bled, Slovenia. We show that it is possible to display live information about air quality (temperature, relative humidity, CO2, particulate matter, volatile organic compound, pressure and luminosity) in a tool like Revit, therefore enabling stakeholders to follow air quality conditions before, during and after the renovation process.

Future work includes developing advanced recommendation mechanisms that can assist BIM users to design better buildings, to improve building performance and to spot weak points in building structure by exploiting sensor information. Such advance requires integrating AI algorithms into our plugin and further integration into BIM software.

ACKNOWLEDGMENTS

The authors gratefully acknowledge the European Commission for funding the InnoRenew CoE project (Grant Agreement 739574) under the Horizon2020 Widespread-Teaming program, the Republic of Slovenia (Investment funding of the Republic of Slovenia and the European Union of the European Regional Development Fund), and the Slovenian Research Agency ARRS for funding infrastructure program IO-0035.

REFERENCES

- [1] Taiwo, E.M., Yahya, K.B., Haron, Z.; Utilisation of building information modelling for indoor environmental quality assessment A review. IOP Conf. Ser.: Earth Environ. Sci. 2019, 220 012051. doi:10.1088/1755-1315/220/1/012051
- [2] Murphy, M., McGovern E., Pavia, S.: Historic building information modelling (HBIM), Structural Survey Vol. 27 (2009) No 4., pp. 311 327
- [3] C.M. Eastman, P. Teicholz, R. Sacks, K. Liston BIM Handbook: A Guide to Building Information Modeling for Owners, Managers, Architects, Engineers, Contractors, and Fabricators John Wiley & Sons, Hoboken, NJ, USA (2008) ISBN: 978-0-470-54137-1
- [4] C. Cruz, Building information modeling, in: A Report of LAB, Le2i, Université de Bourgogne, 2008.
- [5] NIBS, National Building Information, Modeling Standards Part-1: Overview, Principles and Methodologies, US National Institute of Building Sciences Facilities Information Council, BIM Committee, 2007.
- [6] J. Zhang, A. Webster, M. Lawrence, M. Nepal, R. Pottinger, S. Staub-French, M. Tory Improving the usability of standard schemas Inform. Syst., 36 (2) (2011), pp. 209-221
- [7] A. Lee, S. Wu, G. Aouad, A. Lee, S. Wu (Eds.), nD Modelling: The Background in Constructing the Future: nD Modelling, Taylor and Francis (2006)
- [8] W. Tizani, M.J. Mawdesley Advances and challenges in computing in civil and building engineering Adv. Eng. Inform., 25 (2011), pp. 569-572
- [9] U. Ruppel, K. Schatz Designing a BIM-based serious game for fire safety evacuation simulations Adv. Eng. Inform., 25 (2011), pp. 600-611
- [10]T. Nguyen, T. Shehab, Z. Gao Evaluating sustainability of architectural designs using building information modeling Open Construct. Build. Technol. J., 4 (2010), pp. 1-8
- [11]Dave, Bhargav & Buda, Andrea & Nurminen, Antti & Främling, Kary. (2018). A framework for integrating BIM and IoT through open standards. Automation in Construction. 95. 35-45. 10.1016/j.autcon.2018.07.022.
- [12]Changjiang Xiao, Nengcheng Chen, Dandan Li, You Lv, Jianya Gong (2017). "SCRMS: An RFID and Sensor Web-Enabled Smart Cultural Relics Management System"
- [13]Marulli, Fiammetta; Pareschi, Remo; Baldacci, Daniele (2016). "The Internet of Speaking Things and Its Applications to Cultural Heritage"
 [14]Borda, Ann; Bowen Jonathan P. (2017). "Smart Cities and Cultural Heritage A Review of Developments and Future
- Opportunities"

 [14] Michaela Banza, EuNetAir Concertium, COST, Action, TD1105: Overview of Sensor systems, for Air quality.
- [15]Michele Penza, EuNetAir Consortium, COST Action TD1105: Overview of Sensor-systems for Air-quality Monitoring, Procedia Engineering, Volume 87, 2014, 1370-1377, ISSN 1877-7058
- [16]Aleixandre, M.; Gerboles, M. Review of small commercial sensors for indicative monitoring of ambient gas. *Chem. Eng. Trans.* **2012**, *30*, 169–174.
- [17]Karagulian, Federico & Barbiere, Maurizio & Kotsev, Alexander & Spinelle, Laurent & Gerboles, Michel & Lagler, Friedrich & Redon, N. & Crunaire, Sabine & Borowiak, Annette. (2019). Review of the Performance of Low-Cost Sensors for Air Quality Monitoring. Atmosphere. 10.3390/atmos10090506.